

SPEAKER WIRE: 12 AWG

12 gauge speaker wire

APPLICATIONS

- Speakers
- Receivers
- Amplifiers

COMPATIBLE WITH

- Pin Connectors
- Banana Plug: Straight
- Banana Plug: 90° Angle
- 5-way Wall Box

ADVANTAGES



- Installs on surface of walls and ceilings
- Foil-thin wire bends to any angle
- No special installation tools required
- No soldering
- Paintable insulation
- Disappears with concealing compound and paint

FEATURES

- FlatWire connectors ensure exact placement of components and easy installation
- Custom strain reliefs provide a template to easily expose conductors

SPECIFICATIONS

- Length: 25', 50', 100', 500' (7.62m, 15.24m, 30.48m, 152.40m)
- Width: 2.274" (57.759mm)
- Thinness: 0.008" (0.203mm)
- Oxygen Free Copper
- DCR: 1.59 Ω per 1000 feet

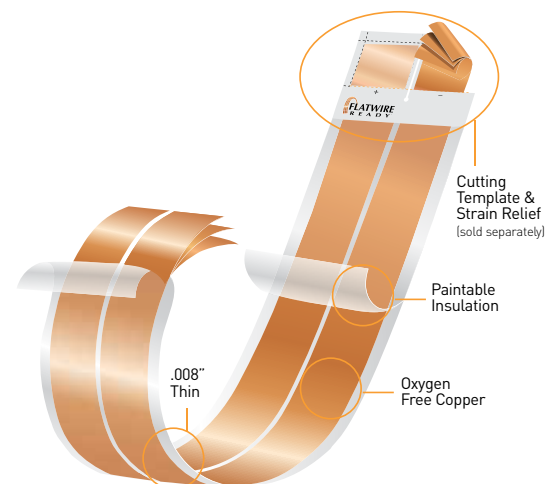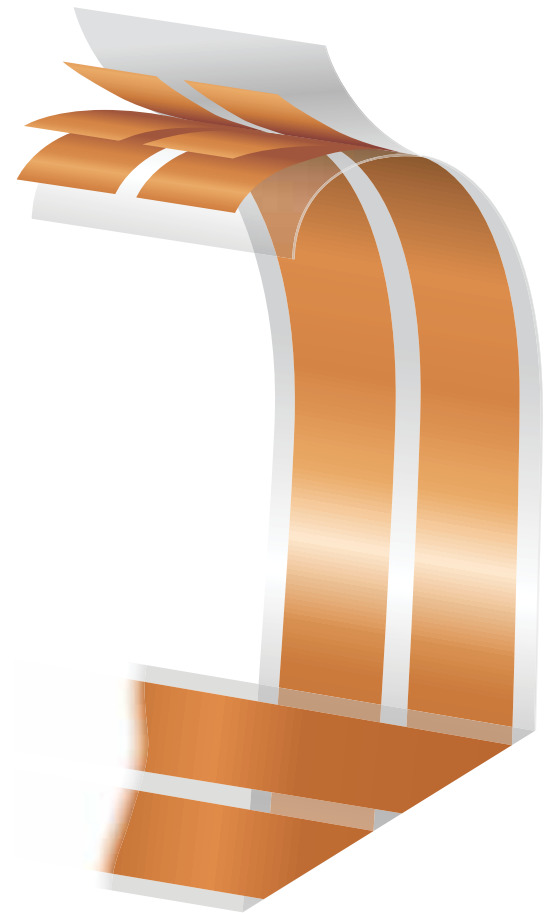

SPEAKER WIRE: 14e AWG

14e gauge speaker wire

APPLICATIONS

- Speakers
- Receivers
- Amplifiers

COMPATIBLE WITH

- Pin Connectors
- Banana Plug: Straight
- Banana Plug: 90° Angle
- 5-way Wall Box

ADVANTAGES



- Installs on surface of walls and ceilings
- Foil-thin wire bends to any angle
- No special installation tools required
- No soldering
- Paintable insulation
- Disappears with concealing compound and paint

FEATURES

- FlatWire connectors ensure exact placement of components and easy installation
- Custom strain reliefs provide a template to easily expose conductors

SPECIFICATIONS

- Length: 25', 50', 100', 500' (7.62m, 15.24m, 30.48m, 152.40m)
- Width: 2.274" (57.759mm)
- Thinness: 0.006" (0.152mm)
- Oxygen Free Copper
- DCR: 2.38 Ω per 1000 feet

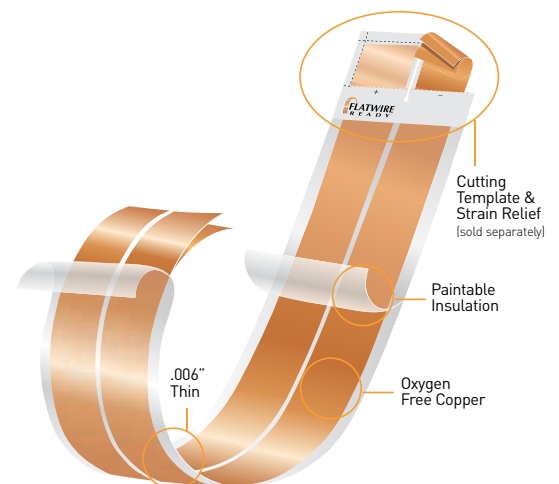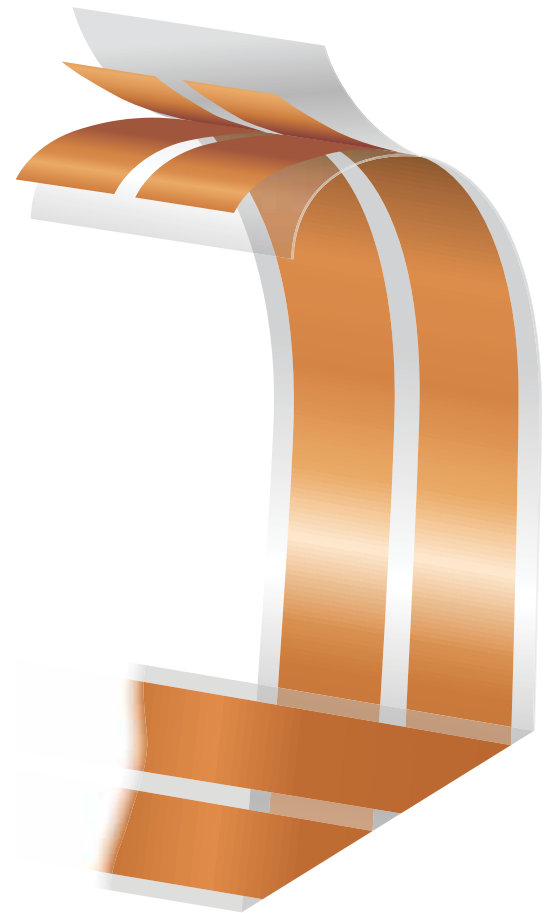

SPEAKER WIRE: 18e AWG

18e gauge speaker wire

APPLICATIONS

- Speakers
- Receivers
- Amplifiers

COMPATIBLE WITH

- Pin Connectors
- Banana Plug: Straight
- Banana Plug: 90° Angle
- 5-way Wall Box

ADVANTAGES

- Installs on surface of walls and ceilings
- Foil-thin wire bends to any angle
- No special installation tools required
- No soldering
- Paintable insulation
- Disappears with concealing compound and paint

FEATURES

- FlatWire connectors ensure exact placement of components and easy installation
- Custom strain reliefs provide a template to easily expose conductors

SPECIFICATIONS

- Length: 25', 50', 100', 500' (7.62m, 15.24m, 30.48m, 152.40m)
- Width: 2.274" (57.759mm)
- Thinness: 0.004" (0.102mm)
- Oxygen Free Copper
- DCR: 4.76 Ω per 1000 feet

